


ASSEMBLY INSTRUCTIONS

Thank you for choosing a Banner Support System, the unique lightweight banner system for outdoor use.

- 1. Insert the flexilble rod tips all the way into the end of each pocket. Be careful not to let go of the rod and have it flick out of your control and cause injury. Do not run hands along the rod as you may pick up a fibreglass splinter. Handle with care.
- 2. The rod will straighten itself, creating a banner that stands out from the pole at all times, even in zero wind.

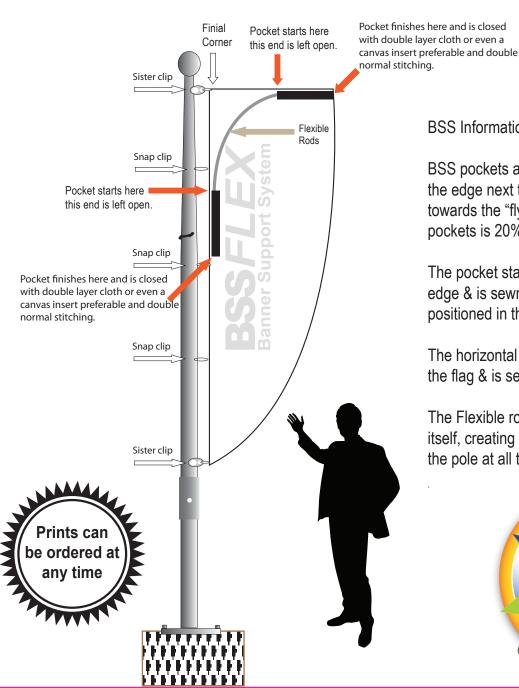

BSS Information:

BSS pockets are sewn down the leading edge which is the edge next to the flagpole and also at the top across towards the "fly" end fo the flag. The length of these pockets is 20% of the total length of the flag.

The pocket starts 33% of the way down the leading edge & is sewn back towards the finial corner which is positioned in the top left corner.

The horizontal pocket starts at the top right corner of the flag & is sewn towards the finial corner.

The Flexible rod is then inserted and will straighten itself, creating a flag / banner which stands out from the pole at all times, even in zero wind.



